

# ST. MARTIN CLAIR

SP




## RECOMMENDED APPLICATIONS

FLOORS & WALLS	SHOWER FLOORS & WALLS	EXTERIOR PAVING FREEZE THAW STABLE
YES	YES	YES

## TECHNICAL SPECIFICATIONS

COMPRESSIVE STRENGTH	TENSILE STRENGTH	WATER ABSORPTION	BULK DENSITY
124 MPa	10.9 MPa	1.1%	2.62 T/m <sup>3</sup>

## STOCKED SIZES

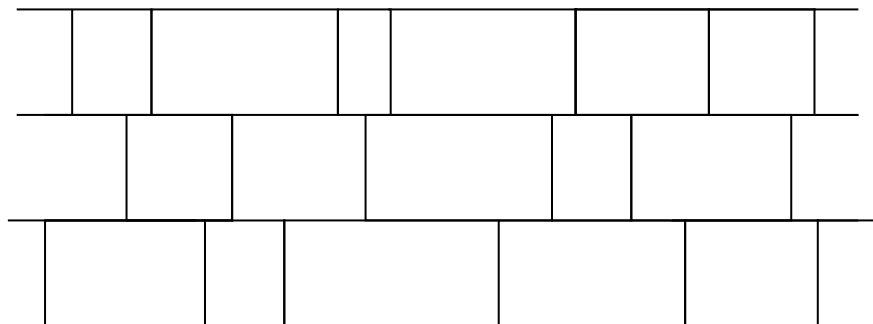

14" x Random Lengths x 2cm

## MATERIAL

LIMESTONE

## COUNTRY OF ORIGIN

FRANCE

## NOTES

- FLAMED 2CM THICK MATERIAL IS APPROPRIATE FOR EXTERIOR USE
- LENGTHS RANGE FROM 8" TO 28" // SOLD BY THE PATTERN IN MULTIPLES OF 4.35SF
- OTHER SIZES OR FINISHES AVAILABLE VIA SPECIAL ORDER
- STONE IS A NATURAL PRODUCT. IT IS IMPERATIVE THAT YOU REQUEST JOB SAMPLES AND RANGE PICTURES FOR EVERY JOB

## RANGE

