
TUSCAN FIORITO

SP



RECOMMENDED APPLICATIONS				
FLOORS & WALLS	SHOWER FLOORS & WALLS	EXTERIOR PAVING FREEZE THAW STABLE		
YES	YES	NOT TESTED		

TE	TECHNICAL SPECIFICATIONS				
COMPRESSIVE STRENGTH	TENSILE STRENGTH	WATER ABSORPTION	BULK DENSITY		
133 MPa	19.5 MPa	1.09%	2660 kg/m ³		

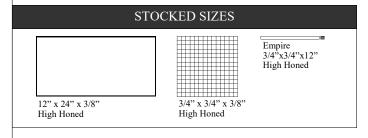



NOTES		RANGE	
•	OTHER SIZES OR FINISHES AVAILABLE VIA SPECIAL ORDER		
•	STONE IS A NATURAL PRODUCT. IT IS IMPERATIVE THAT YOU REQUEST JOB SAMPLES AND RANGE PICTURES FOR EVERY JOB		